


# HK PA MC

Cable gland Ex protection

## Properties

<b>Design</b>	Cable glands in accordance with ATEX, IECEx and EAC
<b>Operating temperature</b>	-60 °C to +100 °C
<b>Material</b>	Nickel-plated brass
<b>Use</b>	for use with non-armoured, plastic-insulated cables Ø 6.5 - 11.9 mm

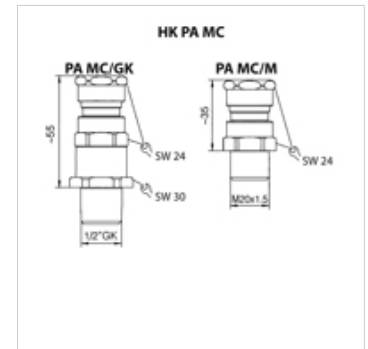

## Item

Identification	Thread	Weight (kg)
HK PA MC GK	G 1/2"	0,3
HK PA MC M	M 20 x 1.5	0,3

## Accessory for following products

HK DHA	Solenoid-operated directional control valve size 6, Ex-protected
--------	--