
HK 9RD 02 BG0

Properties

Design	without central phase compensation valves internal leak oil discharge
Rotational speed range	1200 - 2700 U/min
Pressure difference	max. 30 bar (between the sections)
Recommended speed	1800 - 2000 rpm

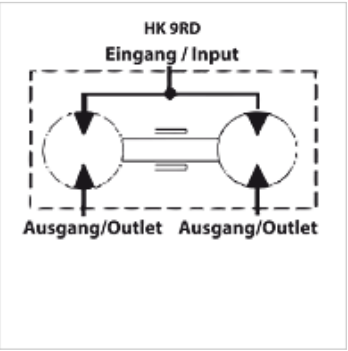

Note

Before commissioning the system, the first running-in of the gear flow divider should be under no load.

Description

This flow divider is used to supply two independent hydraulic circuits with just one pump
Division error approx. 3%
Configuration of gear flow dividers: qi = Q/z * 1000/n
qi = displacement/section [cm3]; Q = total intake volumetric flow [l/min]; z = no. of sections; n = rotating speed [rpm]

Item

Identification	Intake volume per section (cc)	p1 max. (bar)	Flow per element min. (L/min)	Flow per element max. (L/min)	Flow per element (L/min)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	H (mm)	Li (mm)	Ø R1 (mm)	Weight (kg)
HK 9RD 02 01	0,17	210	0,20	1,20	0,40	29,3	187,6	46	32,5	54,25	88,3	50	174	6,5	1,2
HK 9RD 02 02	0,25	210	0,30	1,80	0,70	29,9	188,8	46	32,5	54,25	88,3	50	175	6,5	1,2
HK 9RD 02 04	0,45	210	0,60	3,00	1,20	31,5	192,0	46	32,5	54,25	88,3	50	178	6,5	1,2
HK 9RD 02 05	0,57	210	0,80	3,80	1,50	32,5	194,0	46	32,5	54,25	88,3	50	180	6,5	1,2
HK 9RD 02 06	0,76	210	1,00	4,80	2,00	34,0	197,0	46	32,5	54,25	88,3	50	183	6,5	1,2

p1 = max. working pressure

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.