
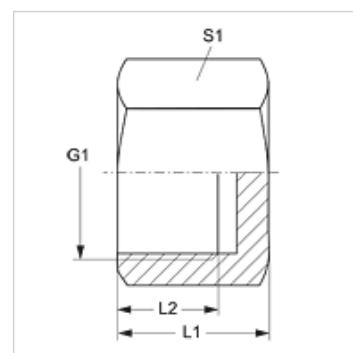


### Características

Conexión 1	Rosca interior BSP cilíndricas
Forma de obturación 1	obturación plana
Construcción	Tuerca de cierre
Material	Acero fino



### Artículo

Denominación	G1	L1 (mm)	L2 (mm)	S1
<b>VSSK IR 02 VA</b>	G 1/8" -28	15,0	10,0	14
<b>VSSK IR 04 VA</b>	G 1/4" -19	18,0	12,5	17
<b>VSSK IR 06 VA</b>	G 3/8" -19	19,0	13,0	22
<b>VSSK IR 08 VA</b>	G 1/2" -14	21,0	14,5	27
<b>VSSK IR 12 VA</b>	G 3/4" -14	24,5	18,5	32
<b>VSSK IR 16 VA</b>	G 1" -11	25,0	19,0	41
<b>VSSK IR 20 VA</b>	G 1 1/4" -11	29,0	22,0	50
<b>VSSK IR 24 VA</b>	G 1 1/2" -11	31,0	23,5	55
<b>VSSK IR 32 VA</b>	G 2" -11	32,0	24,5	70

SW, S1, S2 = ancho de llave