


PHY 300

Engaste a presión NY 300

HANSA FLEX

Características

| | |
|-----------------------------|-------------------------------|
| Clase de engaste | Engaste sin pelar |
| Material | Acero |
| Protección de la superficie | con revestimiento galvanizado |

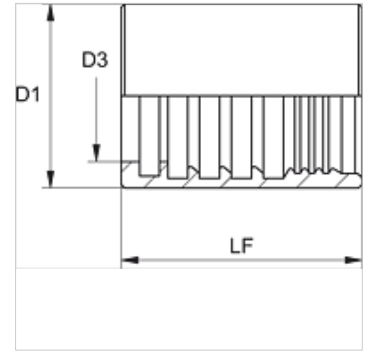

Artículo

| Denominación | DN* | Tamaño | Pulgadas | D1 (mm) | D3 (mm) | LF (mm) |
|--------------|-----|--------|----------|------------|------------|------------|
| PHY 306 | 6 | 4 | 1/4" | 18,0 | 11,3 | 43,0 |
| PHY 308 | 8 | 5 | 5/16" | 20,0 | 11,3 | 40,0 |
| PHY 310 | 10 | 6 | 3/8" | 23,0 | 13,7 | 47,0 |
| PHY 313 | 12 | 8 | 1/2" | 29,0 | 16,6 | 50,0 |
| PHY 316 | 16 | 10 | 5/8" | 32,0 | 19,9 | 60,0 |
| PHY 320 | 19 | 12 | 3/4" | 37,0 | 24,5 | 60,0 |
| PHY 325 | 25 | 16 | 1" | 42,0 | 29,5 | 60,0 |

DN = diámetro nominal, ancho nominal