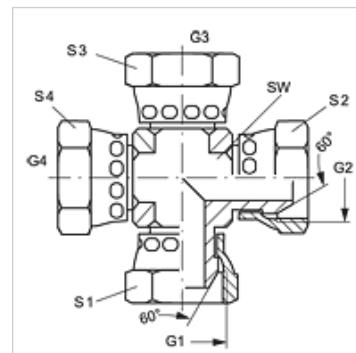


**Características**

Conexión 1 - 4	Roscas de tuerca BSP
Forma de obturación 1 - 4	Cono exterior 60°
Construcción	Conector
Forma constructiva	en K
Material	Acero
Protección de la superficie	con revestimiento galvanizado

**Artículo**

Denominación	G1 - G4	SW (mm)	S1 - S4 (mm)
<b>K AB 02</b>	G 1/8" -28	11	14
<b>K AB 04</b>	G 1/4" -19	14	19
<b>K AB 06</b>	G 3/8" -19	19	22
<b>K AB 08</b>	G 1/2" -14	22	27
<b>K AB 10</b>	G 5/8" -14	22	30
<b>K AB 12</b>	G 3/4" -14	27	32
<b>K AB 16</b>	G 1" -11	33	41
<b>K AB 20</b>	G 1 1/4" -11	41	50
<b>K AB 24</b>	G 1 1/2" -11	48	60
<b>K AB 32</b>	G 2" -11	64	70

SW, S1, S2 = ancho de llave

**Variantes de producto**

<b>K AB VA</b>	Tuerca de racor para conexión rebordeada, Acero fino
----------------	--