
K-MANO ABSPV ZAPF DREH MUF 16271B

Pressure gauge shut-off valves, male - loose female and shaft for instrument holder, with test socket M 20 x 1.5, DIN 16271

HANSA-FLEX

Características

Presión de servicio	max. 250 bar brass, max. 400 bar steel/ stainless steel
Temperatura	Max. +120 °C with brass/steel; Max. +200 °C for stainless steel
Material de todos los comp.	Stainless steel
Material obturador	PTFE
Carcasa	Brass, black-finished steel or stainless steel 1.4571
Rueda manual	Plastic
Tuerca racor mang. sujeción	Steel
Husillo de válv., cono de válv.	Stainless steel

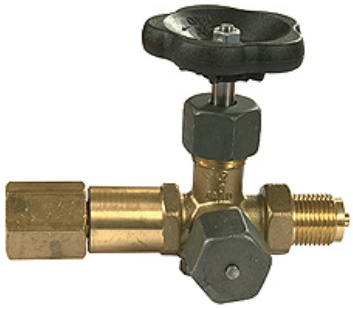

Nota

Otras especificaciones a petición.

Descripción

They are used as shut-off or reducing elements for pressure gauges when measuring liquids, gases or steam.

Artículo

Denominación	Rosca	PN (bar)	SW (mm)	Material
K- 07 20 11 20	G 1/2	250	27	Latón
K- 07 20 11 19	G 1/2	400	27	Stainless steel

Hemos revisado cuidadosamente esta publicación, pero no obstante no podemos excluir los errores y no garantizamos los datos que constan aquí.