


K-SCHL-AUFROLLER LUFT H

Hose reels for compressed air, high flow capacity

HANSA FLEX

Características

| | |
|----------------------------|----------------------|
| Material del tubo flexible | Braided polyurethane |
| Presión de servicio | máx. 12 bares |
| Temperatura de servicio | -20 °C to +60 °C |
| Ángulo de giro | 300° |

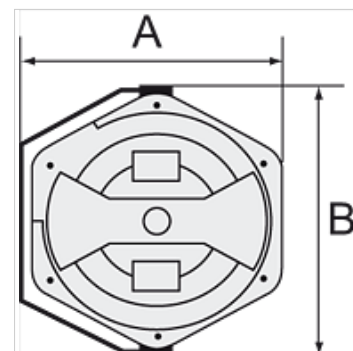

Nota

Otras especificaciones a petición.

Descripción

Specially designed to ensure a high flow capacity. Easy mounting on the wall or ceiling. Closed, rugged, impact-resistant housing made of POM, supply/outlet R 1/4 male thread and lightweight, hard-wearing, oil-resistant polyurethane hose. Incl. 2 m feeder hose.

Artículo

| Denominación | Medida de mang. | A (mm) | B (mm) | Long. manguera (m) |
|----------------|-----------------|-----------|-----------|-----------------------|
| K- 07 10 06 14 | 16 mm x 11 mm | 394,5 | 436,0 | 10 |