

K-GRUNDEJEKTION SBP-C ELK

Basic ejector »SBP-C« with blow-off valve and electronic vacuum switch, with integrated silencer

Características

Características	Vacuum generator with a single nozzle, available in six power ratings, with a high maximum vacuum value (85%) Connection of compressed air and vacuum with push-in coupling Basic housing with connection facility for a vacuum switch Maximum suction capacity with minimum compressed air consumption Minimum size, low weight Various power ratings for optimised air consumption
Aplicación	For universal use in handling systems with very high dynamic movements Handling all kinds of air-tight components For use in separation systems where space is restricted. \nConstruction of ejector blocks for centralised or decentralised individual control of suction pads.
Sistema de boquilla	Brass
Conexión	Push-in coupling
Silenciador	Plastic
Cuerpo base	Impact-resistant plastic

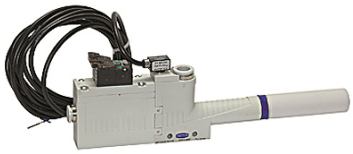

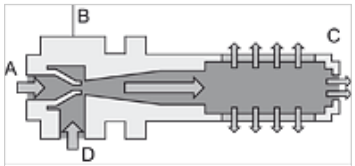

Nota

Otras especificaciones a petición.

Descripción

Purely pneumatic vacuum ejector that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

Artículo

Denominación	Tamaño de boquilla	Vál. succión pos. reposo	Conexión de aire comprimido	Conex. vacío	Dimensión
K- 07 45 01 20	1,0	NO	6 mm	8 mm	142mm x 15mm x 50mm
K- 07 45 01 22	1,5	NO	6 mm	8 mm	142mm x 15mm x 50mm
K- 07 45 01 24	2,0	NO	8 mm	10 mm	228mm x 20mm x 72mm
K- 07 45 01 26	2,5	NO	8 mm	10 mm	228mm x 20mm x 72mm

Accesorios

K-ERSATZSCHALLDAEMPFER 1	Replacement silencers
K-GRUNDPLATTEN 1	Base plate
K-BEFESTIGUNGSSAETZE 1	Mounting kit

Hemos revisado cuidadosamente esta publicación, pero no obstante no podemos excluir los errores y no garantizamos los datos que constan aquí.