
K-INLINE-EJEKTTOREN VR

Inline ejectors »VR«, screw connection

Características

Características	Vacuum generator with high maximum vacuum level (85% vacuum) No moving parts, which means no wear and no maintenance ultra small footprint, suitable for confined spaces minimal air consumption \nlow noise
Aplicación	by screwing / plugging into the distribution beam direct attachment to the suction pad for handling various workpieces
Carcasa	Aluminium eloxed (type VR)
Sistema de boquilla	Brass (type VR)
Conexión	Conexión insertables



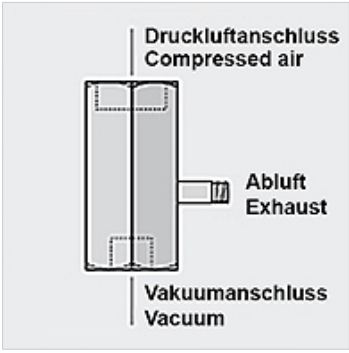

Nota

Otras especificaciones a petición.

Descripción

For vacuum generation directly at the point of use. For direct installation between the suction pad and the compressed air supply. Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector and flows through a nozzle. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet. This air and the driving air leave the ejector and enter the atmosphere via the exhaust air outlet.

Artículo

Denominación	Tamaño de boquilla	Conex. aire de escape	Conexión de aire comprimido	Conex. vacío	Grado de evacuación	Consumo de aire aspir. (L/min)	Capacidad máx. aspiración (L/min)	Long-itud (mm)	Presión de servicio (bar)
K- 07 45 01 29	0,7	M 5 male	G 1/4 IG	G1/8 female	90 %	21,0	14,0	35,0	5,0
K- 07 45 01 30	0,9	M 5 male	G 1/4 IG	G1/8 female	89 %	36,0	21,0	35,0	5,0

Hemos revisado cuidadosamente esta publicación, pero no obstante no podemos excluir los errores y no garantizamos los datos que constan aquí.