


# K-DRUCKSCHALTER VAKUUM

Combined vacuum/pressure switch

**HANSA FLEX**

## Características

Construcción	PNP
Conexión medio med.	G 1/8 male and M 5 female
Histéresis	Adjustable: 3 to 25% of set value
Rango de temperatura	0 - 50 °C
Medios	Non-aggressive gases. dry, oil-free air
Carcasa	Polycarbonate
Señal de salida	Analogue: 1 to 5 V
Conexión eléctrica	Male connector M8, four pin
Capacidad de conmut.	125 mA
Consumo de corriente	30 mA
Indicador de estado	LED

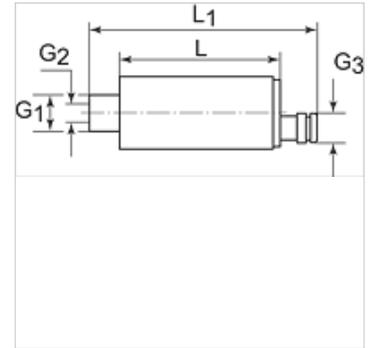

## Nota

Otras especificaciones a petición.

## Descripción

Universal electronic vacuum and pressure switch for safety monitoring, optimisation of cycle times and regulation circuits. Its small size and low weight permit installation directly at the point of use. Suitable for all special applications in the vacuum and compressed air sectors. Adjustable vacuum limit value and continuous vacuum monitoring.

## Artículo

Denominación	G1 exterior	G2 interior	G3 exterior	L (mm)	L1 (mm)	Rango de medición	Tensión
K- 07 45 01 31	G 1/8	M 5	M 8 x 1	44,0	62,0	-1 bis +10 bar	10.8 - 30 V DC