
K-HAND-SCHIEBEVENTIL
Manual slide valves

HANSA-FLEX

Características

Presión de servicio	máx. 10 bar
Temperatura de servicio	max. +70 °C



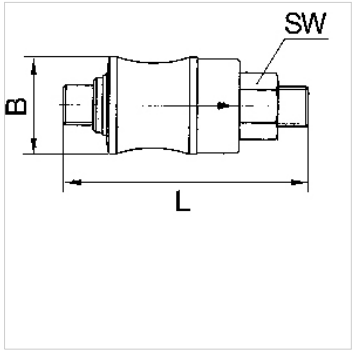

Nota

Otras especificaciones a petición.

Descripción

For use on devices that have to be vented whenever they are turned off, either because of safety regulations or for technical reasons. The pneumatic devices are disconnected from the system and simultaneously vented each time they are shut off.

Artículo

Denominación	Rosca	B (mm)	L (mm)	SW (mm)
K- 07 30 15 92	G 1/8	21,0	67,0	14
K- 07 30 15 93	G 1/4	24,0	77,0	17
K- 07 30 15 94	G 3/8	31,0	87,0	22
K- 07 30 15 95	G 1/2	35,0	104,0	26

Hemos revisado cuidadosamente esta publicación, pero no obstante no podemos excluir los errores y no garantizamos los datos que constan aquí.