



# K-MV G 230 V, 50 - 60 HZ D

Normally closed, 230 V, 50 to 60 Hz, directly operated

**HANSA FLEX**

## Características

Conexión eléctrica	For Pg 11P connector socket, acc. to DIN 4400
Tipo de protecc.	IP65 (with connector socket fitted)
Temper. de medios	max. +90 °C with Perbunan-seal; max. +130 °C with FKM-Seal
Carcasa, asiento de vál.	Stainless steel
Piezas int.	Stainless steel
Obturac.	Perbunan (NBR) or FKM

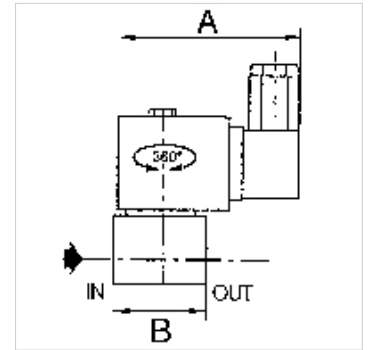

## Nota

Otras especificaciones a petición.

## Descripción

Available versions, Directly operated, Combined operation

## Artículo

Denominación	Rosca	Presión de servicio máx. (bar)	NW	Material obturador	A (mm)	B (mm)	Forma constructiva
K- 07 30 22 46	G 1/8	20	2,4	NBR	80,0	30,0	1
K- 07 30 22 48	G 1/8	20	2,4	FKM	80,0	30,0	1
K- 07 30 22 47	G 1/4	12	4,0	NBR	85,0	45,0	1
K- 07 30 22 49	G 1/4	12	4,0	FKM	85,0	45,0	1