



K-MV G 230 V, 50 - 60 HZ D

Normally closed, 230 V, 50 to 60 Hz, directly operated

HANSA FLEX

Características

Conexión eléctrica	For Pg 11P connector socket, acc. to DIN 4400
Tipo de protecc.	IP65 (with connector socket fitted)
Temper. de medios	max. +90 °C with Perbunan-seal; max. +130 °C with FKM-Seal
Carcasa, asiento de vál.	Stainless steel
Piezas int.	Stainless steel
Obturac.	Perbunan (NBR) or FKM

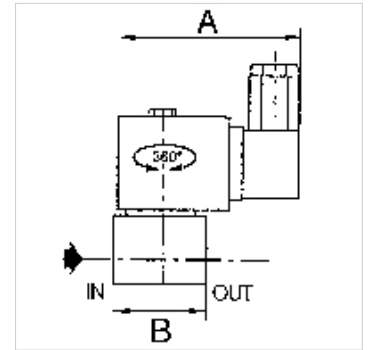

Nota

Otras especificaciones a petición.

Descripción

Available versions, Directly operated, Combined operation

Artículo

Denominación	Rosca	Presión de servicio máx. (bar)	NW	Material obturador	A (mm)	B (mm)	Forma constructiva
K- 07 30 22 46	G 1/8	20	2,4	NBR	80,0	30,0	1
K- 07 30 22 48	G 1/8	20	2,4	FKM	80,0	30,0	1
K- 07 30 22 47	G 1/4	12	4,0	NBR	85,0	45,0	1
K- 07 30 22 49	G 1/4	12	4,0	FKM	85,0	45,0	1