


# K-NADELVENTILE VA

Needle valves

**HANSA FLEX**

## Características

<b>Presión de servicio</b>	max. 400 bar (at 20 °C); max. 250 bar (at G 1 - 20 °C)
<b>Temperatura de servicio</b>	-20 °C to +120 °C
<b>Material obturador</b>	PTFE
<b>Carcasa</b>	Stainless steel 1.4571
<b>Rueda manual</b>	Plastic
<b>Material</b>	sealing: PTFE

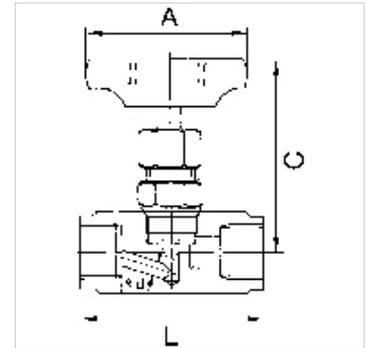

## Nota

G thread acc. to DIN EN ISO 228-1, with ISO flange plate (acc. to ISO 5211)  
Otras especificaciones a petición.

## Indicaciones para pedidos

For use on devices that have to be vented whenever they are turned off, either because of safety regulations or for technical reasons. The pneumatic devices are disconnected from the system and simultaneously vented each time they are shut off.

## Información adicional

Port sizes G 1 1/4, G 1 1/2 and G 2 available on request

## Artículo

Denominación	DN	Rosca	A (mm)	C (mm)	L (mm)
K- 07 30 24 03	4	G 1/8	50,0	74,0	50,0
K- 07 30 24 04	5	G 1/4	50,0	73,0	50,0
K- 07 30 24 05	6	G 3/8	50,0	72,0	55,0
K- 07 30 24 06	8	G 1/2	63,0	83,0	60,0
K- 07 30 24 07	10	G 3/4	63,0	100,0	75,0
K- 07 30 24 08	12	G 1	80,0	110,0	100,0