
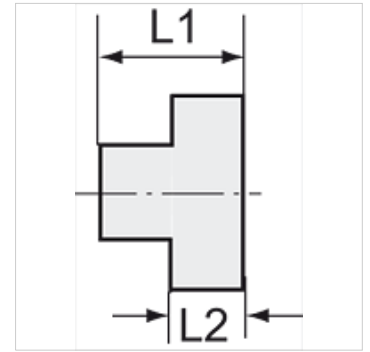


K-VSTOK 6

Plugs, hexagonal

Características

| | |
|---------------------------|------------------------------|
| Presión de funcionamiento | Max. 20 bar |
| Rosca exterior | Parallel to DIN EN ISO 228-1 |
| Material | Stainless steel 1.4408 |

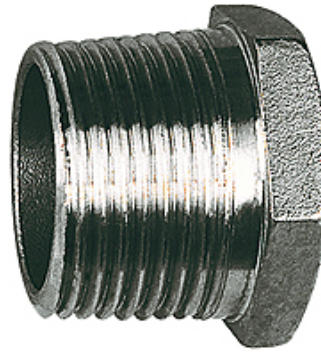

Nota

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes. Otras especificaciones a petición.

Artículo

| Denominación | Rosca | L1 (mm) | L2 (mm) | SW |
|----------------|---------|------------|------------|-------|
| K- 07 40 39 82 | G 1/8 | 17,3 | 6,3 | 12 mm |
| K- 07 40 39 83 | G 1/4 | 18,3 | 6,2 | 17 mm |
| K- 07 40 39 84 | G 3/8 | 19,3 | 6,0 | 21 mm |
| K- 07 40 39 85 | G 1/2 | 22,2 | 6,0 | 26 mm |
| K- 07 40 39 86 | G 3/4 | 25,2 | 6,8 | 31 mm |
| K- 07 40 39 87 | G 1 | 27,0 | 7,3 | 38 mm |
| K- 07 40 39 88 | G 1 1/4 | 30,2 | 7,7 | 46 mm |
| K- 07 40 39 89 | G 1 1/2 | 32,4 | 8,8 | 53 mm |
| K- 07 40 39 90 | G 2 | 36,0 | 10,0 | 63 mm |