

K-XV

Unions, pipe connection on both sides



HANSA FLEX

Características

Rango de presión Max. 60 bar

Temperatura Max. 150 °C

Material Latón niquelado

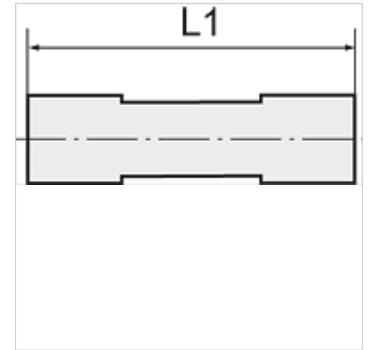

Nota

Otras especificaciones a petición.

Artículo

| Denominación | Ø exterior tubo | L1 (mm) | SW | SW1 (mm) |
|----------------|-----------------|------------|-------|-------------|
| K- 07 40 20 29 | 4 mm | 34,0 | 10 mm | 10 |
| K- 07 40 20 30 | 6 mm | 35,0 | 12 mm | 12 |
| K- 07 40 20 31 | 8 mm | 38,5 | 14 mm | 14 |
| K- 07 40 20 32 | 10 mm | 47,5 | 17 mm | 19 |
| K- 07 40 20 33 | 12 mm | 48,0 | 19 mm | 22 |
| K- 07 40 20 34 | 15 mm | 50,0 | 24 mm | 27 |
| K- 07 40 20 35 | 18 mm | 56,0 | 27 mm | 32 |