



K-SCHOTTNIPPEL ES

Bulkhead nipples

HANSA FLEX

Características

| | |
|---------------------------|-------------------|
| Presión de funcionamiento | Max. 20 bar |
| Material | Acero fino 1.4571 |

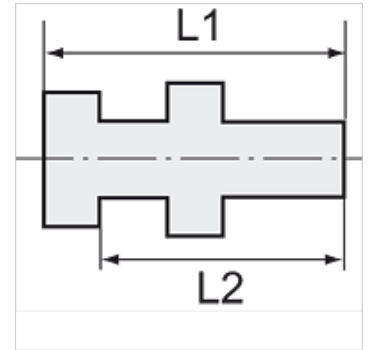

Nota

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Otras especificaciones a petición.

Información adicional

Further types and dimensions on request.

Artículo

| Denominación | Rosca exterior | Rosca interior | L1 (mm) | L2 (mm) | SW1 (mm) | SW2 (mm) |
|----------------|----------------|----------------|------------|------------|-------------|-------------|
| K- 07 40 34 24 | G 1/4 | G 1/8 | 18,0 | 14,0 | 17 | 17 |
| K- 07 40 34 25 | G 3/8 | G 1/4 | 22,0 | 17,0 | 19 | 24 |
| K- 07 40 34 26 | G 1/2 | G 3/8 | 27,0 | 21,0 | 24 | 24 |