


K-DBV MANO 1/4"

Pressure limiting valves size 1/4

Características

| | |
|---------------------------|--|
| Construcción | Spring-loaded, non-return diaphragm valve with adjustable opening pressure |
| Temper. de medios | max. 60 °C |
| Temp. entorno | Max. 60 °C |
| Material obturador | NBR |
| Caperuza elást. | POM/brass |
| Carcasa | Die-cast zinc, painted silver |
| Membrana | NBR |

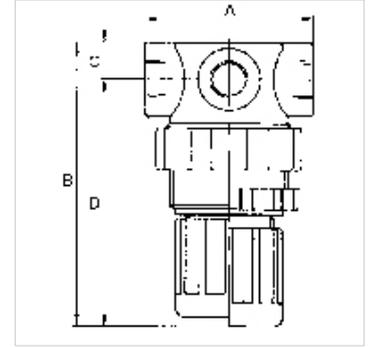

Nota

Otras especificaciones a petición.

Descripción

Manually adjustable overflow valves. For protecting pneumatic systems against damage caused by excess pressure.

Artículo

| Denominación | Rosca | Rango de regulación | A (mm) | B | C (mm) | D (mm) |
|----------------|-------|---------------------|-----------|---------|-----------|-----------|
| K- 07 25 01 93 | G 1/4 | 0.1 - 2.0 bar | 43,0 | 70,0 mm | 10,0 | 60,0 |
| K- 07 25 01 94 | G 1/4 | 0.1 - 3.0 bar | 43,0 | 70,0 mm | 10,0 | 60,0 |
| K- 07 25 01 95 | G 1/4 | 0.15 - 7.0 bar | 43,0 | 70,0 mm | 10,0 | 60,0 |
| K- 07 25 01 96 | G 1/4 | 0.5 - 10.0 bar | 43,0 | 70,0 mm | 10,0 | 60,0 |

Piezas de repuesto

| | |
|-----------------------------|--|
| K-HALTERBAUSATZ | Holder |
| K-SCHALTAFELMUTTER | Nut |
| K-VERSCHLEI-SATZ | Set of wearing parts |
| K-SCHALLDAE SINTERBR AG 569 | Silencers, sintered bronze, flat type with male thread, 569 Series |
| K-GERAETESTECKER | Coupling socket |