


K-FI REGL H ABLV VA

Filter regulators

HANSA FLEX

Características

Presión de entrada	Max. 30 bar
Temper. de medios	max. 130 °C
Temp. entorno	Max. 60 °C
Flujo de paso	2500 l/min
Ancho de poros en elemento filtrante	50 µm
Material obturador	FKM
Membrana	PTFE on NBR base
Material	stainless steel 1.4404 (AISI 316L)
Drain valve	Manual drain valve
Medic. valor de flujo	At P1 = 10 bar, P2 = 5 bar and pressure drop $\Delta p \leq 1$ bar

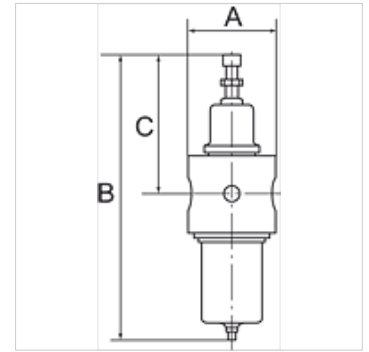

Nota

Otras especificaciones a petición.

Descripción

Stainless steel filter regulators with self-relieving (not for liquid media) containing no non-ferrous metals for use in the food processing, chemical, mining, plant construction and special machinery industries as well as in the medical technology.

Indicaciones para pedidos

With filter element 5 µm available on request. Without self-relieving design (for liquids) available on request. With semi- or fully automatic drain valve on request. With NPT threads available on request.

Artículo

Denominación	Rosca	Rango de regulación	A (mm)	B	C (mm)
K- 07 25 06 52	G 1/4	1.0 - 15.0 bar	65,0	250,0 mm	125,0
K- 07 25 06 51	G 1/2	1.0 - 15.0 bar	80,0	260,0 mm	127,0

Piezas de repuesto

K-HALTERBAUSATZ EDELSTAHL	Holder
K-MANO	Pressure gauges (CrNi steel type / connection on rear)
K-VERSCHLEI-SATZ	Set of wearing parts