


# K-DRG DRVS HANSA

Pressure regulators with continuous pressure supply

**HANSA FLEX**

## Características

|                        |   |
|------------------------|---|
| Presión de entrada     | Max. 16 bar   |
| Rango de temperatura   | -10 °C to +50 °C  |
| Medios                 | aire comprimido   |
| Roscas interiores      | Material: Die-cast zinc   |
| Carcasa                | Material: Grivory® (PA 66)  |
| Membrana               | NBR   |
| Consumo de aire propio | only G3/4, G1 Max. 1.5 l/min (depending on secondary pressure)    |
| Medic. valor de flujo  | At P1 = 10 bar, P2 = 6.3 bar and pressure drop $\Delta p = 1$ bar |

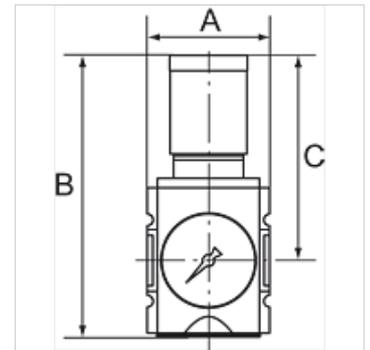

## Nota

Otras especificaciones a petición.

## Descripción

Diaphragm pressure regulators with self-relieving design and excellent flow rates in modern design for mounting side by side. By assembling two or more controllers together, it is possible to supply several working air circuits with different output pressures via a single supply line. The regulator button can be latched and locked.

## Indicaciones para pedidos

The price does not include a key lock. Please order separately.

## Artículo

| Denominación   | Rosca | Rango de regulación | Flujo de paso (L/min) | A (mm) | B        | C (mm) | Tamaño constructivo |
|----------------|-------|---------------------|-----------------------|--------|----------|--------|---------------------|
| K- 07 25 02 51 | G 1/4 | 0.1 - 1 bar         | 2200                  | 52,0   | 128,5 mm | 95,5   | 1                   |
| K- 07 25 02 52 | G 1/4 | 0.1 - 2 bar         | 2200                  | 52,0   | 128,5 mm | 95,5   | 1                   |
| K- 07 25 02 53 | G 1/4 | 0.2 - 4 bar         | 2200                  | 52,0   | 128,5 mm | 95,5   | 1                   |
| K- 07 25 02 54 | G 1/4 | 0.5 - 8 bar         | 2200                  | 52,0   | 128,5 mm | 95,5   | 1                   |
| K- 07 25 02 55 | G 1/4 | 0.5 - 10 bar        | 2200                  | 52,0   | 128,5 mm | 95,5   | 1                   |
| K- 07 25 02 56 | G 1/4 | 0.5 - 16 bar        | 2200                  | 52,0   | 128,5 mm | 95,5   | 1                   |
| K- 07 25 02 69 | G 3/8 | 0.1 - 1 bar         | 2600                  | 52,0   | 128,5 mm | 95,5   | 1                   |
| K- 07 25 02 70 | G 3/8 | 0.1 - 2 bar         | 2600                  | 52,0   | 128,5 mm | 95,5   | 1                   |
| K- 07 25 02 71 | G 3/8 | 0.2 - 4 bar         | 2600                  | 52,0   | 128,5 mm | 95,5   | 1                   |
| K- 07 25 02 72 | G 3/8 | 0.5 - 8 bar         | 2600                  | 52,0   | 128,5 mm | 95,5   | 1                   |
| K- 07 25 02 73 | G 3/8 | 0.5 - 10 bar        | 2600                  | 52,0   | 128,5 mm | 95,5   | 1                   |
| K- 07 25 02 74 | G 3/8 | 0.5 - 16 bar        | 2600                  | 52,0   | 128,5 mm | 95,5   | 1                   |
| K- 07 25 02 57 | G 3/8 | 0.1 - 1 bar         | 4300                  | 63,0   | 149,5 mm | 110,0  | 2                   |
| K- 07 25 02 58 | G 3/8 | 0.1 - 2 bar         | 4300                  | 63,0   | 149,5 mm | 110,0  | 2                   |
| K- 07 25 02 59 | G 3/8 | 0.2 - 4 bar         | 4300                  | 63,0   | 149,5 mm | 110,0  | 2                   |
| K- 07 25 02 60 | G 3/8 | 0.5 - 8 bar         | 4300                  | 63,0   | 149,5 mm | 110,0  | 2                   |
| K- 07 25 02 61 | G 3/8 | 0.5 - 10 bar        | 4300                  | 63,0   | 149,5 mm | 110,0  | 2                   |
| K- 07 25 02 62 | G 3/8 | 0.5 - 16 bar        | 4300                  | 63,0   | 149,5 mm | 110,0  | 2                   |
| K- 07 25 02 63 | G 1/2 | 0.1 - 1 bar         | 5000                  | 63,0   | 149,5 mm | 110,0  | 2                   |
| K- 07 25 02 64 | G 1/2 | 0.1 - 2 bar         | 5000                  | 63,0   | 149,5 mm | 110,0  | 2                   |
| K- 07 25 02 65 | G 1/2 | 0.2 - 4 bar         | 5000                  | 63,0   | 149,5 mm | 110,0  | 2                   |
| K- 07 25 02 66 | G 1/2 | 0.5 - 8 bar         | 5000                  | 63,0   | 149,5 mm | 110,0  | 2                   |
| K- 07 25 02 67 | G 1/2 | 0.5 - 10 bar        | 5000                  | 63,0   | 149,5 mm | 110,0  | 2                   |
| K- 07 25 02 68 | G 1/2 | 0.5 - 16 bar        | 5000                  | 63,0   | 149,5 mm | 110,0  | 2                   |

## Accesorios

K-STECKSCHLOSS Key lock

## Piezas de repuesto

|                          |                    |
|--------------------------|--------------------|
| K-HALTERBAUSATZ HANSA    | Holder HANSA       |
| K-SCHALTAFELMUTTER HANSA | Nut HANSA          |
| K-DICHTSATZ HANSA        | Set of seals HANSA |