


K-NEBELOEL METALLBEHAE S T MULTIFIX

Oil-mist lubricators with metal bowl and sight glass, metal sight dome

HANSA FLEX

Características

Presión de entrada	Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl)
Temper. de medios	max. 60 °C
Temp. entorno	Max. 60 °C
Material obturador	NBR
Carcasa	Die-cast zinc, Aluminium for G 1 variant
Suplem. de goteo	PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl)
Drain valve	Manual
Tipo de aceite	CL 32 acc. to DIN 51517 - ISO VG 32
Medic. valor de flujo	At P1 = 6 bar and pressure drop $\Delta p = 1$ bar

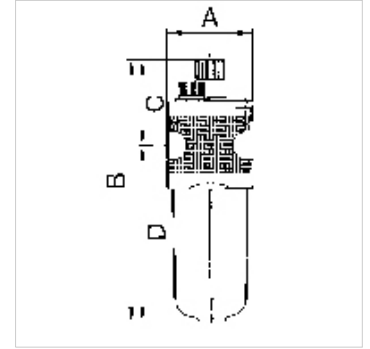

Nota

Otras especificaciones a petición.

Descripción

Proportional lubricators, oil can be filled under pressure.

Artículo

Denominación	Rosca	Flujo de paso (L/min)	A (mm)	B	C (mm)	D (mm)	DN	Tamaño constructivo
K- 07 25 00 92	G 1/4	1900	47,8	181,3 mm	71,3	110,0	6	1
K- 07 25 00 95	G 3/8	1900	47,8	181,3 mm	71,3	110,0	10	1
K- 07 25 00 98	G 1/2	5000	68,8	213,0 mm	79,3	133,7	15	2
K- 07 25 01 01	G 3/4	5000	68,8	213,0 mm	79,3	133,7	20	2
K- 07 25 01 04	G 1	18000	100,0	322,9 mm	82,7	240,2	25	3

Piezas de repuesto

K-HALTERBAUSATZ MULTIFIX	Holder
K-KOPPELPAKET MEHR	Coupling packet
K-KOPPELPAKET SCHMA	Coupling packet
K-METALLBEHAELTER OELER MULTIFIX	Metal tank oiler
K-PC-BEHAEALTER FILTER MULTIFIX	Polycarbonate tank filter
K-SCHUTZKORB G	Protective cage
K-TROPFAUFSATZ POLYCARBO 1	Drip attachment polycarbonate
K-TROPFAUFSATZ METALL	Drip attachment metal