


# K-NEBELOEL METALLBEHAE S T MULTIFIX

Oil-mist lubricators with metal bowl and sight glass, metal sight dome

**HANSA FLEX**

## Características

|                       |  |
|-----------------------|--|
| Presión de entrada    | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl) |
| Temper. de medios     | max. 60 °C   |
| Temp. entorno         | Max. 60 °C   |
| Material obturador    | NBR  |
| Carcasa               | Die-cast zinc, Aluminium for G 1 variant                   |
| Suplem. de goteo      | PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl)       |
| Drain valve           | Manual   |
| Tipo de aceite        | CL 32 acc. to DIN 51517 - ISO VG 32                        |
| Medic. valor de flujo | At P1 = 6 bar and pressure drop $\Delta p = 1$ bar         |

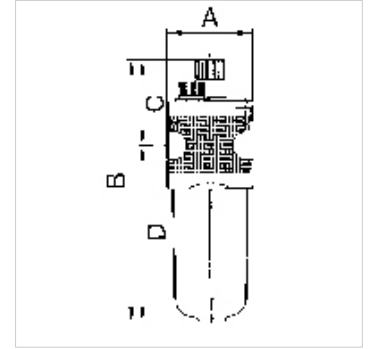

## Nota

Otras especificaciones a petición.

## Descripción

Proportional lubricators, oil can be filled under pressure.

## Artículo

| Denominación   | Rosca | Flujo de paso (L/min) | A (mm) | B        | C (mm) | D (mm) | DN | Tamaño constructivo |
|----------------|-------|-----------------------|--------|----------|--------|--------|----|---------------------|
| K- 07 25 00 92 | G 1/4 | 1900                  | 47,8   | 181,3 mm | 71,3   | 110,0  | 6  | 1                   |
| K- 07 25 00 95 | G 3/8 | 1900                  | 47,8   | 181,3 mm | 71,3   | 110,0  | 10 | 1                   |
| K- 07 25 00 98 | G 1/2 | 5000                  | 68,8   | 213,0 mm | 79,3   | 133,7  | 15 | 2                   |
| K- 07 25 01 01 | G 3/4 | 5000                  | 68,8   | 213,0 mm | 79,3   | 133,7  | 20 | 2                   |
| K- 07 25 01 04 | G 1   | 18000                 | 100,0  | 322,9 mm | 82,7   | 240,2  | 25 | 3                   |

## Piezas de repuesto

|                                  |                               |
|----------------------------------|-------------------------------|
| K-HALTERBAUSATZ MULTIFIX         | Holder                        |
| K-KOPPELPAKET MEHR               | Coupling packet               |
| K-KOPPELPAKET SCHMA              | Coupling packet               |
| K-METALLBEHAELTER OELER MULTIFIX | Metal tank oiler              |
| K-PC-BEHAEALTER FILTER MULTIFIX  | Polycarbonate tank filter     |
| K-SCHUTZKORB G                   | Protective cage               |
| K-TROPFAUFSATZ POLYCARBO 1       | Drip attachment polycarbonate |
| K-TROPFAUFSATZ METALL            | Drip attachment metal         |