



# K-VT MULTIFIX MINI

Manifold

**HANSA FLEX**

## Características

Presión de entrada	Max. 16 bar
Temper. de medios	max. 60 °C
Temp. entorno	Max. 60 °C
Flujo de paso	P-A = 2700 l/min\nP-B and P-C = 1300 l/min
Material obturador	NBR
Carcasa	Die-cast zinc
Medic. valor de flujo	At P1 = 6 bar and pressure drop $\Delta p = 1$ bar

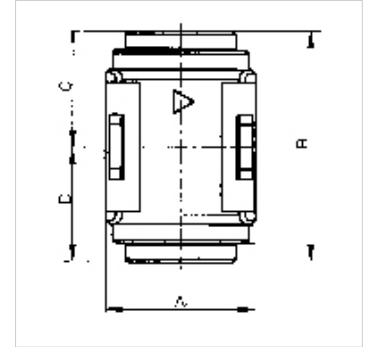

## Nota

If several devices in the »multifix-mini« Series are assembled together, the maximum working pressure is 12 bar.  
Otras especificaciones a petición.

## Descripción

Narrow, two-way manifold with two G 1/8 outlets.

## Artículo

Denominación	Rosca	A (mm)	B	C (mm)	D (mm)
K- 07 25 11 81	G 1/4	23,0	36,0 mm	18,0	18,0

## Piezas de repuesto

K-KOPPELPAKET MEHR	Coupling packet
--------------------	-----------------