


# K-WTEH 2-TLG PC SCHU H ABL STANDARD

Service units with polycarbonate bowl, bowl guard and semi-automatic drain valve

**HANSA FLEX**

## Características

|   |  |
|---|--|
| <b>Presión de entrada</b>                   | Max. 16 bar (polycarbonate bowl / bowl guard), Max. 25 bar (metal bowl)    |
| <b>Rango de regulación</b>                  | 0.5 to 10 bar (polycarbonate bowl / bowl guard) 0.5 to 16 bar (metal bowl) |
| <b>Temper. de medios</b>                    | max. 60 °C   |
| <b>Temp. entorno</b>                        | Max. 60 °C   |
| <b>Ancho de poros en elemento filtrante</b> | 5 µm (Size 1 / Size 3), 40 µm (Size 2 / Size 4)                            |
| <b>Material obturador</b>                   | NBR  |
| <b>Carcasa</b>                              | Die-cast zinc / Aluminium, painted silver                                  |
| <b>Suplem. de goteo</b>                     | PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl)                       |
| <b>Medic. valor de flujo</b>                | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar             |

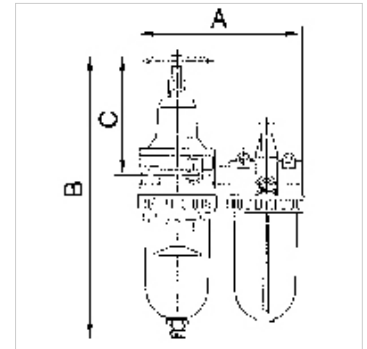

## Nota

Otras especificaciones a petición.

## Descripción

Two-piece service units consisting of a reversible diaphragm pressure regulator, independent of inlet pressure, with self-relieving design, combined with a centrifugal separator and a proportional lubricator.

## Artículo

| Denominación   | Rosca | Flujo de paso (L/min) | A (mm) | B        | C (mm) | DN | Ø Manómetro |
|----------------|-------|-----------------------|--------|----------|--------|----|-------------|
| K- 07 25 14 95 | G 1/4 | 600                   | 117,0  | 236,2 mm | 106,5  | 6  | 50          |
| K- 07 25 14 98 | G 3/8 | 600                   | 117,0  | 236,2 mm | 106,5  | 6  | 50          |
| K- 07 25 15 01 | G 3/8 | 800                   | 150,0  | 266,4 mm | 120,5  | 10 | 63          |
| K- 07 25 15 04 | G 1/2 | 2100                  | 175,0  | 299,4 mm | 130,0  | 15 | 63          |
| K- 07 25 15 07 | G 3/4 | 4000                  | 220,0  | 452,0 mm | 190,6  | 20 | 63          |
| K- 07 25 15 10 | G 1   | 4000                  | 220,0  | 452,0 mm | 190,6  | 25 | 63          |

## Piezas de repuesto

|                            |   |
|----------------------------|---|
| K-HALTERBAUSATZ STANDARD   | Holder  |
| K-SCHUTZKORB G             | Protective cage   |
| K-VERSCHLEI-SATZ           | Set of wearing parts                                      |
| K-FILTERELEMENT            | Filter element  |
| K-TROPFAUFSATZ POLYCARBO   | Drip attachment polycarbonate                             |
| K-XV AGM MS NI             | Double nipples, parallel male thread, nickel-plated brass |
| K-RD NIPPEL MS NI          | Reducing nipples - nickel-plated brass                    |
| K-LOESBARE DOPPELNIPPEL MS | Double nipples  |
| K-TROPFAUFSATZ METALL      | Drip attachment metal                                     |
| K-ABLASSVENTIL AUTO        | Fully-automatic drain valve with Adapter G 1/8            |
| K-AUTOMAT ABLASSVENTIL     | Automatic drain valve                                     |