


K-DRG DRVS VARIOBLOC

Pressure regulators with pressure supply at both ends

HANSA FLEX

Características

| | |
|-----------------------|---|
| Presión de entrada | Max. 25 bar |
| Temper. de medios | max. 50 °C |
| Temp. entorno | Max. 50 °C |
| Material obturador | NBR |
| Caperuza elást. | POM-brass |
| Carcasa | Die-cast zinc |
| Medic. valor de flujo | At P1 = 10 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

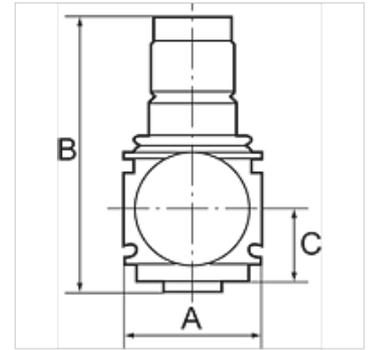

Nota

Otras especificaciones a petición.

Descripción

Diaphragm pressure regulators with self-relieving design for mounting side by side. The pressure setting can be locked by pushing the knob down.
By assembling two or more controllers together, it is possible to supply several working air circuits with different output pressures via a single supply line.

Indicaciones para pedidos

Pressure regulators are also available in lockable version. Please ask for more information.

Artículo

| Denominación | Rosca | Rango de regulación | Flujo de paso (L/min) | A (mm) | B | C (mm) |
|----------------|-------|---------------------|-----------------------|--------|---------|--------|
| K- 07 25 04 33 | G 1/4 | 0.5 - 6 bar | 1800 | 48,0 | 98,0 mm | 26,0 |
| K- 07 25 04 34 | G 1/4 | 0.5 - 10 bar | 1800 | 48,0 | 98,0 mm | 26,0 |
| K- 07 25 04 35 | G 1/4 | 0.5 - 16 bar | 1800 | 48,0 | 98,0 mm | 26,0 |
| K- 07 25 04 36 | G 3/8 | 0.5 - 6 bar | 1800 | 48,0 | 98,0 mm | 26,0 |
| K- 07 25 04 37 | G 3/8 | 0.5 - 10 bar | 1800 | 48,0 | 98,0 mm | 26,0 |
| K- 07 25 04 38 | G 3/8 | 0.5 - 16 bar | 1800 | 48,0 | 98,0 mm | 26,0 |

Piezas de repuesto

K-VERSCHLEI-SATZ VARIOBLOC Set of wearing parts