


# K-VHR IS BUND MS NI

Hexagon socket screw plugs with collar

## Características

|                         |                                     |
|-------------------------|-------------------------------------|
| Temperatura de servicio | Max. 150 °C                         |
| Presión                 | Max. 60 bar                         |
| Construcción            | Tapón roscado con hexágono interior |
| Material                | Latón niquelado                     |

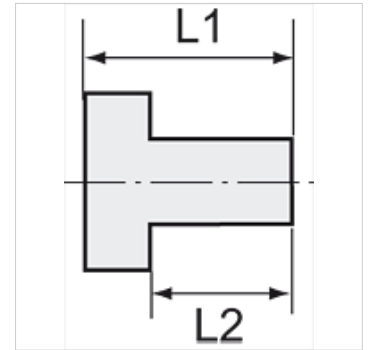

## Nota

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes. Otras especificaciones a petición.

## Descripción

Suitable for air, water, oil, steam, etc.

## Información adicional

Further types and dimensions on request.

## Artículo

| Denominación   | Rosca | L1 (mm) | L2 (mm) | SW    |
|----------------|-------|---------|---------|-------|
| K- 07 40 45 18 | G 1/8 | 11,0    | 8,0     | 5 mm  |
| K- 07 40 45 19 | G 1/4 | 13,0    | 10,0    | 6 mm  |
| K- 07 40 45 20 | G 3/8 | 15,0    | 12,0    | 8 mm  |
| K- 07 40 45 27 | G 1/2 | 18,0    | 14,0    | 10 mm |
| K- 07 40 45 23 | G 3/4 | 24,0    | 20,0    | 12 mm |
| K- 07 40 45 26 | G 1   | 27,0    | 22,0    | 17 mm |