

K-DRG MINI O SEKUNDAERENTLUEFTUNG

Mini pressure regulators

HANSA FLEX

Características

Rango de temperatura -20 °C to +60 °C

Presión Max. 12 bar


Rango de presión Max. 12 bar

Temperatura -20 °C to +60 °C

Flujo de paso 0 - 400 l/min

Muell Stainless-steel

Carcasa Brass

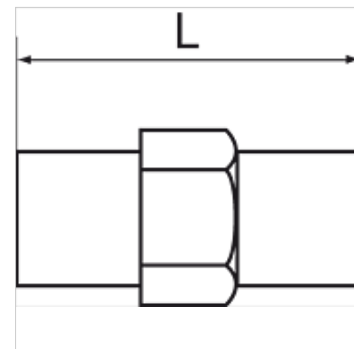

Nota

Otras especificaciones a petición.

Descripción

This preset pressure regulator guarantees optimal pressure conditions, especially in blow guns. The pressure regulator is inserted into the compressed air line. Fits onto any 1/4" thread and maintains the pressure at optimum, thus helping to reduce the costs for energy. Tamper-proof.

Artículo

| Denominación | Rosca | Pres. trabajo preajustada | L (mm) |
|----------------|------------------|---------------------------|-----------|
| K- 07 25 03 03 | G 1/4 außen/male | 2 bar | 24,0 |
| K- 07 25 03 04 | G 1/4 außen/male | 4 bar | 24,0 |
| K- 07 25 03 05 | G 1/4 außen/male | 6 bar | 24,0 |