
K-SCHALLDAE FRUEHWARNFUKT

Silencers with early warning function

Características

Presión de servicio	5 bar
Temperatura de servicio	Max. 70 °C
Norma	G thread acc. to DIN EN ISO 228-1
Material	PP



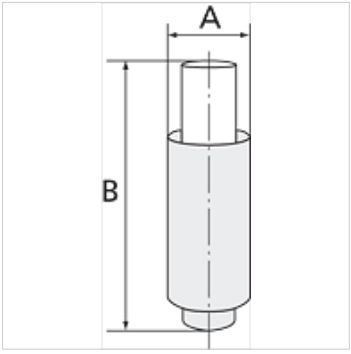

Nota

Otras especificaciones a petición.

Descripción

The silencer’s warning indicator gives an early warning if the back pressure in the system is too high. Maintenance personnel can both see and hear (from the elevated sound level) that it is time to replace the silencer before costly and unnecessary disruptions impair operation.
The design is based on a two-chamber system with inner and outer silencing chambers.
The inner diffuser serves as a warning indicator that is pressed out when back pressure is too high.
The silencer should be replaced as soon as the inner diffuser extends far enough to show the red marking on the warning indicator.

Artículo

Denominación	Rosca	A (mm)	B (mm)	Flujo de paso (L/min)	Nivel de ruido (dBA)	Reducción de ruido
K- 07 40 15 22	G 1/8 male	15,7	35,5	450	65,5	32 dB(A)
K- 07 40 15 23	G 1/4 male	19,6	42,6	883	66,5	33 dB(A)
K- 07 40 15 24	G 3/8 male	26,8	57,0	1480	73,2	30 dB(A)
K- 07 40 15 25	G 1/2 male	32,4	73,5	1910	76,5	33 dB(A)

Hemos revisado cuidadosamente esta publicación, pero no obstante no podemos excluir los errores y no garantizamos los datos que constan aquí.