



# K-BKR DREHGRIFF IG AG

Ball valves with wing lever, female/male thread

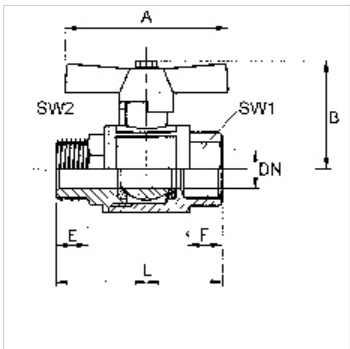

| Características         |                                                                                                                        |
|-------------------------|------------------------------------------------------------------------------------------------------------------------|
| Campo de aplicación     | Compressed air, water, non-toxic and neutral gases, heating oil (EL),(S), lubricants, diesel oil, water based coatings |
| Temperatura de servicio | -20 °C to +130 °C                                                                                                      |
| Descripción de rosca    | G thread acc. to DIN EN ISO 228-1, R thread acc. to DIN EN 10226 (ISO 7-1)                                             |
| Carcasa                 | Nickel-plated brass                                                                                                    |
| Palanca                 | Alu, painted black                                                                                                     |
| Bola                    | hardchrome-plated brass                                                                                                |
| Obturación esférica     | PTFE                                                                                                                   |
| Obturación de husillo   | PTFE                                                                                                                   |



**Nota**  
Otras especificaciones a petición.

| Artículo       |    |         |          |        |        |        |        |        |          |          |
|----------------|----|---------|----------|--------|--------|--------|--------|--------|----------|----------|
| Denominación   | DN | Rosca   | PN (bar) | A (mm) | B (mm) | E (mm) | F (mm) | L (mm) | SW1 (mm) | SW2 (mm) |
| K- 07 30 20 37 | 8  | G/R 1/4 | 80       | 45,0   | 43,0   | 11,0   | 7,0    | 49,0   | 18       | 18       |
| K- 07 30 20 38 | 10 | G/R 3/8 | 80       | 45,0   | 45,5   | 11,0   | 9,0    | 56,0   | 21       | 21       |
| K- 07 30 20 39 | 15 | G/R 1/2 | 80       | 55,0   | 54,5   | 15,0   | 8,0    | 68,0   | 27       | 26       |
| K- 07 30 20 40 | 20 | G/R 3/4 | 80       | 55,0   | 58,5   | 16,0   | 13,0   | 77,0   | 33       | 32       |
| K- 07 30 20 41 | 25 | G/R 1   | 80       | 70,0   | 70,5   | 19,0   | 14,5   | 88,4   | 40       | 39       |