



K-XRD STECKANSCHLUSS Z GEW AGR OR

Straight non-return valves, flow direction from tube to port, parallel male thread with O-ring

HANSA FLEX

Características

| | |
|---------------------------|--|
| Presión de funcionamiento | Max. 10 bar, vacuum |
| Campo de aplicación | Air, vacuum |
| Mangueras recomendadas | PU or PA (nylon) |
| Medios | aire comprimido |
| Norma | M thread acc. to DIN 13-1, with O-Ring G thread acc. to DIN EN ISO 228-1, with O-Ring |
| Rango de temperatura | 0 °C to +60 °C |
| Superficie de obturación | O-ring (NBR) |
| Material | Plastic, Nickel plated brass |
| Anillo de presión | Plastic |

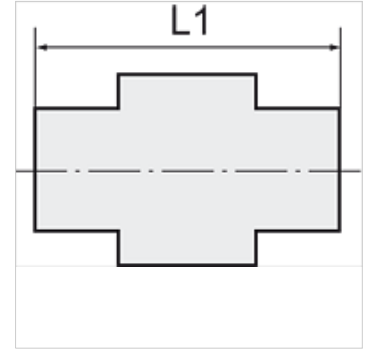

Nota

Otras especificaciones a petición.

Descripción

The non-return function of these push-in fittings prevents the air from flowing back. the unidirectional design means air flow is only possible in one direction. These valves are available with air flow from the port to the tube or from the tube to the port.

Artículo

| Denominación | Rosca | para Ø exterior de tubo flexible | L1 (mm) | Presión de apertura (bar) | SW |
|----------------|-------|----------------------------------|------------|------------------------------|-------|
| K- 07 40 08 83 | M 5 | 4 mm | 31,0 | 0,2 | 10 mm |
| K- 07 40 08 78 | G 1/8 | 4 mm | 24,2 | 0,2 | 14 mm |
| K- 07 40 08 79 | G 1/8 | 6 mm | 31,0 | 0,2 | 14 mm |
| K- 07 40 08 80 | G 1/8 | 8 mm | 32,8 | 0,2 | 14 mm |
| K- 07 40 08 76 | G 1/4 | 6 mm | 33,0 | 0,2 | 17 mm |
| K- 07 40 08 77 | G 1/4 | 8 mm | 34,8 | 0,2 | 17 mm |
| K- 07 40 08 81 | G 3/8 | 10 mm | 41,0 | 0,2 | 20 mm |
| K- 07 40 08 82 | G 3/8 | 12 mm | 42,5 | 0,2 | 21 mm |
| K- 07 40 08 74 | G 1/2 | 10 mm | 43,0 | 0,2 | 24 mm |
| K- 07 40 08 75 | G 1/2 | 12 mm | 44,5 | 0,2 | 24 mm |