
K-T-VB PP
Union tees

Características

Presión de funcionamiento	on request
Temperatura de servicio	Max. +20 °C
Material	Polypropylene (PP)
Material obturador	NBR



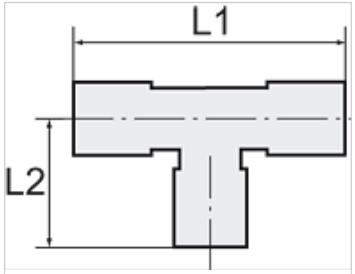

Nota

Otras especificaciones a petición.

Descripción

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Artículo

Denominación	para Ø exterior de tubo flexible	L1 (mm)	L2 (mm)
K- 07 40 28 73	32 mm	199,4	99,7

Hemos revisado cuidadosamente esta publicación, pero no obstante no podemos excluir los errores y no garantizamos los datos que constan aquí.