



# K-WV 5/2 EINS ELEKTRO

5/2-way spool valves, single solenoid

**HANSA FLEX**

## Características

|                         |   |
|-------------------------|---|
| Función                 | 5/2-way   |
| Presión de servicio     | 2.5 - 10 bar; Max. vacuum 10 bar (external pilot air) |
| Presión mín. de trabajo | 2,5 bar   |
| Rango de temperatura    | -10 °C to +60 °C                                      |
| Flujo 6bar y 10bar      | 1500 NI/min (G 1/4), 4600 NI/min (G 1/2)              |
| Conexión eléctrica      | Coupler plug PG 9 - form B                            |
| Tipo de protecc.        | IP 65 (DIN 46244)                                     |
| Carcasa                 | Anodised aluminium, blue                              |
| Corredera de émbolo     | Stainless steel                                       |
| Material obturador      | NBR   |

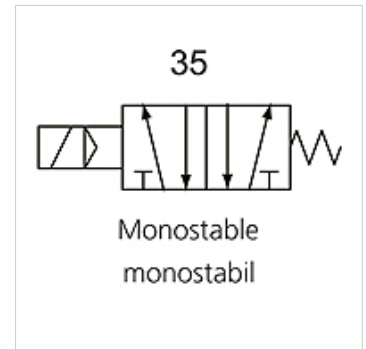

## Nota

Otras especificaciones a petición.

## Descripción

This valve design, featuring the Tapered Tee Seal®, offers the ability to run without lubrication and supports almost any compressed air quality. The valves are largely resistant to dirt and can thus also be used under extreme conditions without any problems. Leakage is now a thing of the past and the spool no longer sticks, even after long idle periods.

## Artículo

| Denominación   | Conexión | Tensión         | DN | Diagr. conexión no | Control |
|----------------|----------|-----------------|----|--------------------|---------|
| K- 07 15 02 21 | G 1/4    | 24 V DC         | 8  | 35                 |         |
| K- 07 15 02 22 | G 1/2"   | 24 V DC         | 15 | 35                 |         |
| K- 07 15 02 23 | G 1/4    | 230 V AC, 50 Hz | 8  | 35                 |         |
| K- 07 15 02 24 | G 1/2"   | 230 V AC, 50 Hz | 15 | 35                 |         |