

K-PRAEZIONS STEUERREGLER

Precision pilot regulators (feedback)

HANSA FLEX

Características

Presión de entrada Max. 16 bar

Temper. de medios max. 80 °C

Temp. entorno Max. 80 °C


Conex. manómetro For feedback pressure

Material obturador FKM

Carcasa Die-cast zinc

Membrana FKM

Consumo de aire propio 3 to 6 l/min

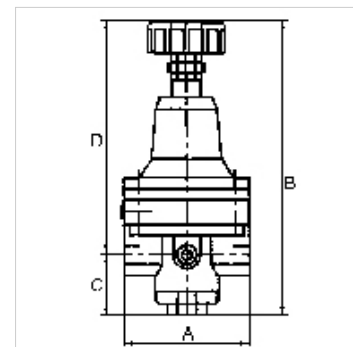

Nota

Otras especificaciones a petición.

Descripción

Diaphragm pressure regulator for feedback systems, specially designed for use in a pneumatically controlled closed control loop in combination with a pressure regulator with pneumatic remote control, e.g. our Art. Nos. K-07250505 to K-07250510.

Artículo

Denominación	Rosca	Rango de regulación	A (mm)	B	C (mm)	D (mm)
K- 07 25 05 11	G 1/4	0.2 - 7 bar	82,0	142,8 mm	19,4	123,4

Accesorios

K-HALTERBAUSATZ STANDARD Holder