


K-SCHL-AUFROLLER LU WA S

Hose reels for compressed air and water, heavy-duty type

HANSA FLEX

Características

| | |
|----------------------------|------------------------|
| Material del tubo flexible | Polyurethane |
| Presión de servicio | máx. 10 bar |
| Temperatura de servicio | -10 °C to +40 °C |
| Fijación | Wall, floor or ceiling |
| Entrada | Hose stem 8 mm |

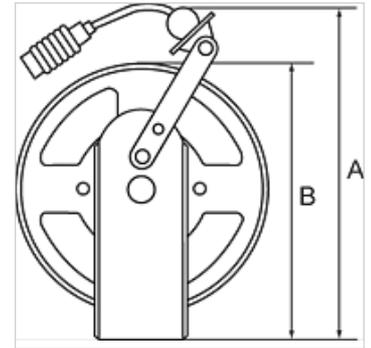

Nota

Otras especificaciones a petición.

Descripción

Heavy-duty steel design for industrial applications. Blue, powder-coated housing. An automatic latching mechanism allows the hose to be engaged at any length. Enclosed spring. Precise locking device for continuous feeding or latching mechanism. Reel guide prevents excessive wear on the hose.

Artículo

| Denominación | Medida de mang. | A (mm) | B (mm) | Long. manguera (m) |
|----------------|-----------------|-----------|-----------|-----------------------|
| K- 07 10 06 24 | 10 mm x 6,5 mm | 420,0 | 353,0 | 10 |
| K- 07 10 06 25 | 10 mm x 6,5 mm | 420,0 | 353,0 | 20 |
| K- 07 10 06 26 | 12 mm x 8 mm | 420,0 | 353,0 | 15 |
| K- 07 10 06 27 | 16 mm x 11 mm | 420,0 | 353,0 | 15 |