


K-T-STECK VERS DRE MINI PAR

Male branch tees, swivel type, mini, parallel thread

HANSA FLEX

Características

Presión de funcionamiento	Max. 10 bar, vacuum
Campo de aplicación	Air, vacuum
Mangueras recomendadas	PU or PA (nylon)
Medios	aire comprimido
Norma	M thread acc. to DIN 13-1, with O-Ring G thread acc. to DIN EN ISO 228-1, with O-Ring R thread acc. to ISO 7-1, thread coating
Rango de temperatura	0 °C to +60 °C
Superficie de obturación	O-ring (NBR)
Material	Plastic, Nickel plated brass
Anillo de presión	Plastic

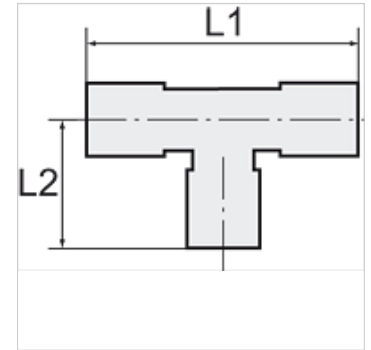

Nota

Otras especificaciones a petición.

Descripción

Push-in fittings series manufactured in plastic and nickel-plated brass, space-saving miniature design.

Artículo

Denominación	Rosca	para Ø exterior de tubo flexible	L1 (mm)	L2 (mm)	SW
K- 07 40 23 04	M 3	3 mm	24,0	16,0	8 mm
K- 07 40 23 05	M 3	4 mm	28,0	17,2	8 mm
K- 07 40 23 06	M 5	3 mm	24,0	16,0	8 mm
K- 07 40 23 07	M 5	4 mm	28,0	17,2	8 mm
K- 07 40 23 08	M 5	6 mm	32,0	18,2	8 mm
K- 07 40 23 09	M 6	3 mm	24,0	16,5	10 mm
K- 07 40 23 10	M 6	4 mm	28,0	17,6	10 mm
K- 07 40 23 11	M 6	6 mm	32,0	18,6	10 mm
K- 07 40 23 12	G 1/8	4 mm	28,0	16,5	14 mm
K- 07 40 23 13	G 1/8	6 mm	32,0	16,5	14 mm
K- 07 40 23 14	R 1/8	4 mm	28,0	18,0	10 mm
K- 07 40 23 15	R 1/8	6 mm	32,0	19,0	10 mm