
K-RD STUECKE PP

Reducers

Características

Presión de funcionamiento	on request
Temperatura de servicio	Max. +20 °C
Material	Polypropylene (PP)
Material obturador	NBR



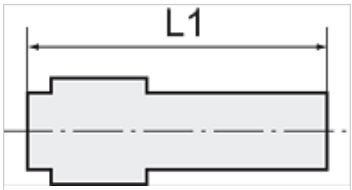

Nota

Otras especificaciones a petición.

Descripción

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Artículo

Denominación	para Ø exterior de tubo flexible	L1 (mm)	Tubul. (mm)
K- 07 40 29 00	22 mm	127,0	32
K- 07 40 29 01	28 mm	133,3	32

Hemos revisado cuidadosamente esta publicación, pero no obstante no podemos excluir los errores y no garantizamos los datos que constan aquí.