
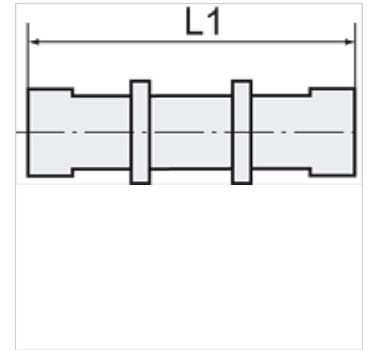


# K-SCHOTT-STECKVERB ABSP

Female bulkhead stop unions (pressure max. 10 bar)

## Características

Presión de funcionamiento	Max. 10 bar, vacuum
Campo de aplicación	Air, vacuum
Mangueras recomendadas	PU or PA (nylon)
Medios	aire comprimido
Norma	M thread acc. to DIN 13-1, with O-Ring
Rango de temperatura	0 °C to +60 °C
Material	Plastic, Nickel plated brass
Anillo de presión	Plastic



## Nota

Otras especificaciones a petición.

## Descripción

The air supply is completely shut off as soon as the hose is disconnected from the union. <br>The flow rate is only guaranteed if the hose is securely inserted.

## Artículo

Denominación	Rosca	para Ø exterior de tubo flexible	L1 (mm)	SW
K- 07 40 43 74	M 12 x 1,5	4 mm	41,0	14 mm
K- 07 40 43 75	M 14 x 1,5	6 mm	44,5	17 mm
K- 07 40 43 76	M 16 x 1,5	8 mm	50,3	19 mm
K- 07 40 43 77	M 20 x 1,5	10 mm	58,5	24 mm
K- 07 40 43 78	M 24 x 1,5	12 mm	62,2	27 mm