



K-ODER-VENTIL

OR valves

HANSA FLEX

Características

Presión de servicio	2 - 10 bar
Rango de temperatura	-10 °C to +80 °C
Flujo a 6,3 bar y Δ 1 bar	500 NI/min (G 1/8), 1300 NI/min (G 1/4)
Cuerpo de válv.	Aluminio
Bola	Stainless steel
Juntas	NBR

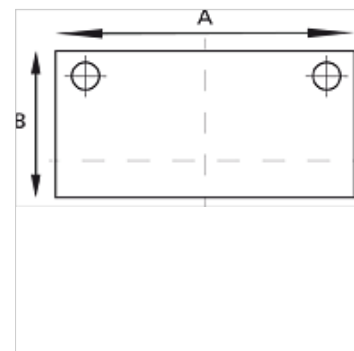

Nota

Otras especificaciones a petición.

Descripción

The valve has two inlets and one outlet. A signal appears at the outlet when the left or right inlet is pressurised.
If the pressure at the two inlets is different, the stronger of the two signals appears at the outlet.

Artículo

Denominación	Rosca	A (mm)	B (mm)
K- 07 15 26 05	3 x G 1/8	36,0	20,0
K- 07 15 26 04	3 x G 1/4	43,0	25,0