


# K-L-STECKVER DREH IG AG-K

Male elbows, swivel type, conical male and female threads, coated



| Características           |                                                                                |
|---------------------------|--------------------------------------------------------------------------------|
| Presión de funcionamiento | Max. 15 bar, coarse vacuum                                                     |
| Campo de aplicación       | Air, vacuum                                                                    |
| Mangueras recomendadas    | PU or PA (nylon)                                                               |
| Medios                    | Compressed air and all gases or liquids that are compatible with the materials |
| Rango de temperatura      | -20 °C to +80 °C                                                               |
| Superficie de obturación  | Conical version: thread coating                                                |
| Material                  | Plastic, Nickel plated brass                                                   |
| Anillo de presión         | Plastic                                                                        |

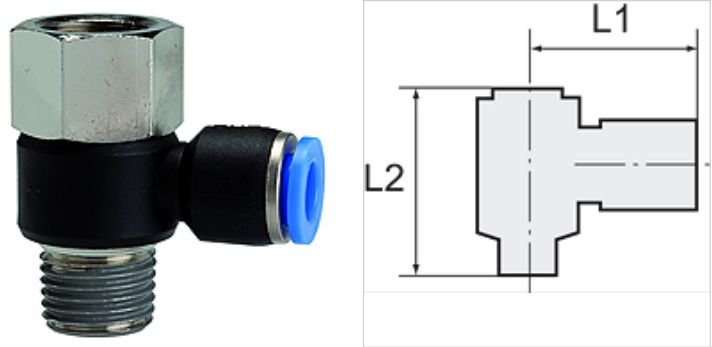

**Nota**  
Otras especificaciones a petición.

**Descripción**  
Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

| Artículo       |          |                                  |         |         |       |
|----------------|----------|----------------------------------|---------|---------|-------|
| Denominación   | Rosca    | para Ø exterior de tubo flexible | L1 (mm) | L2 (mm) | SW    |
| K- 07 40 09 69 | R/Rc 1/8 | 4 mm                             | 22,3    | 29,5    | 14 mm |
| K- 07 40 09 70 | R/Rc 1/8 | 6 mm                             | 23,1    | 29,5    | 14 mm |
| K- 07 40 09 71 | R/Rc 1/8 | 8 mm                             | 25,6    | 29,5    | 14 mm |
| K- 07 40 09 68 | R/Rc 1/8 | 10 mm                            | 30,1    | 29,5    | 14 mm |
| K- 07 40 09 65 | R/Rc 1/4 | 4 mm                             | 24,1    | 34,3    | 17 mm |
| K- 07 40 09 66 | R/Rc 1/4 | 6 mm                             | 25,1    | 34,3    | 17 mm |
| K- 07 40 09 67 | R/Rc 1/4 | 8 mm                             | 28,6    | 34,3    | 17 mm |
| K- 07 40 09 63 | R/Rc 1/4 | 10 mm                            | 32,3    | 34,3    | 17 mm |
| K- 07 40 09 64 | R/Rc 1/4 | 12 mm                            | 33,5    | 34,3    | 17 mm |
| K- 07 40 09 74 | R/Rc 3/8 | 6 mm                             | 26,8    | 40,4    | 21 mm |
| K- 07 40 09 75 | R/Rc 3/8 | 8 mm                             | 29,6    | 40,4    | 21 mm |
| K- 07 40 09 72 | R/Rc 3/8 | 10 mm                            | 32,9    | 40,4    | 21 mm |
| K- 07 40 09 73 | R/Rc 3/8 | 12 mm                            | 35,6    | 40,4    | 21 mm |
| K- 07 40 09 61 | R/Rc 1/2 | 6 mm                             | 29,8    | 47,5    | 24 mm |
| K- 07 40 09 62 | R/Rc 1/2 | 8 mm                             | 32,6    | 47,5    | 24 mm |
| K- 07 40 09 59 | R/Rc 1/2 | 10 mm                            | 35,9    | 47,5    | 24 mm |
| K- 07 40 09 60 | R/Rc 1/2 | 12 mm                            | 36,6    | 47,5    | 24 mm |