


K-DRV W RAENDEL SCHNV OR

Unidirectional flow control valves with incoming air restriction, adjustable with knurled screw, angled, swivel type, parallel male thread with O-ring

HANSA FLEX

Características

| | |
|---------------------------|--|
| Presión de funcionamiento | Max. 15 bar, coarse vacuum |
| Campo de aplicación | Air, vacuum |
| Mangueras recomendadas | PU or PA (nylon) |
| Medios | Compressed air and all gases or liquids that are compatible with the materials |
| Rango de temperatura | -20 °C to +80 °C |
| Superficie de obturación | Parallel version: O-ring in housing, Conical version: thread coating |
| Material | Plastic, Nickel plated brass |
| Anillo de presión | Plastic |

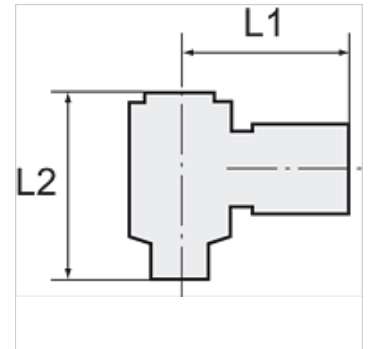

Nota

Otras especificaciones a petición.

Descripción

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Artículo

| Denominación | Rosca | para Ø exterior de tubo flexible | L1 (mm) | L2 mín. (mm) | L2 máx. (mm) | SW |
|----------------|-------|----------------------------------|---------|--------------|--------------|-------|
| K- 07 40 07 39 | M 5 | 4 mm | 20,0 | 29,0 | 31,9 | 8 mm |
| K- 07 40 07 40 | M 5 | 6 mm | 21,7 | 29,0 | 31,9 | 8 mm |
| K- 07 40 07 50 | G 1/8 | 4 mm | 22,3 | 37,8 | 44,0 | 10 mm |
| K- 07 40 07 51 | G 1/8 | 6 mm | 22,9 | 37,8 | 44,0 | 10 mm |
| K- 07 40 07 52 | G 1/8 | 8 mm | 25,3 | 37,8 | 44,0 | 10 mm |
| K- 07 40 07 49 | G 1/8 | 10 mm | 30,1 | 37,8 | 44,0 | 10 mm |
| K- 07 40 07 46 | G 1/4 | 4 mm | 24,0 | 44,0 | 51,0 | 14 mm |
| K- 07 40 07 47 | G 1/4 | 6 mm | 24,9 | 44,0 | 51,0 | 14 mm |
| K- 07 40 07 48 | G 1/4 | 8 mm | 28,4 | 44,0 | 51,0 | 14 mm |
| K- 07 40 07 44 | G 1/4 | 10 mm | 32,0 | 44,0 | 51,0 | 14 mm |
| K- 07 40 07 45 | G 1/4 | 12 mm | 32,0 | 44,0 | 51,0 | 14 mm |
| K- 07 40 07 55 | G 3/8 | 8 mm | 29,3 | 48,7 | 55,0 | 19 mm |
| K- 07 40 07 53 | G 3/8 | 10 mm | 32,5 | 48,7 | 55,0 | 19 mm |
| K- 07 40 07 54 | G 3/8 | 12 mm | 35,3 | 48,7 | 55,0 | 19 mm |
| K- 07 40 07 43 | G 1/2 | 8 mm | 32,3 | 53,0 | 59,2 | 24 mm |
| K- 07 40 07 41 | G 1/2 | 10 mm | 35,5 | 53,0 | 59,2 | 24 mm |
| K- 07 40 07 42 | G 1/2 | 12 mm | 36,3 | 53,0 | 59,2 | 24 mm |