

# K-2-BK V DURCHG INFI

2/2-way ball valve  $\varnothing$  20 mm -  $\varnothing$  63 mm full bore

**HANSA FLEX**

## Características

**Medios** Compressed air, vacuum, inert gases

**Presión de servicio** -0,99 bar - 15 bar

**Rango de temperatura** -20 °C to +80 °C

**Obturac.** NBR


**Carcasa** Nickel-plated brass

**Anillo de apriete** Stainless steel 1.4301

**Tuerca** Aluminium

**Junta tórica** NBR

**Anillos de fijación** Technopolymer

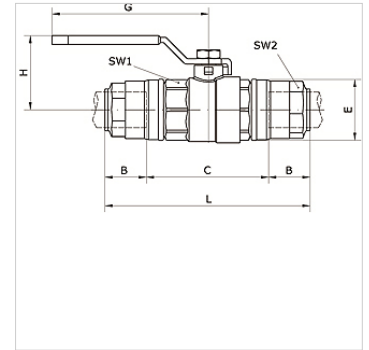

## Artículo

Denominación	$\varnothing$ exterior tubo	B (mm)	C (mm)	DN	E (mm)	G (mm)	H (mm)	L (mm)	SW1 (mm)	SW2 (mm)
K- 07 40 55 05	63 mm	57,5	38,0	59	94,0	240	111,5	232,0	89	75