

VKS ST 400

Nelikantflants, Cetop, eelkeevitatav detail

HANSA FLEX

Omadused


Tüüp Nelikantflants Cetop

Ehitustüüp Sirge

Tavaline CETOP RP 63H
ISO 6164

Materjal S355J2G3 (ST52.3)

Pinnatöötlus must, õlitatud

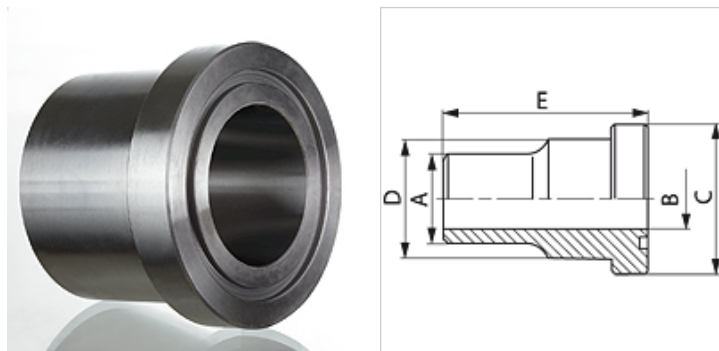

Artikkel

| Märgistus | Surve PB (bar) | Ehitussuurus | A (mm) | Ø B (mm) | C (mm) | D (mm) | E (mm) |
|----------------|-------------------|--------------|-----------|-------------|-----------|-----------|-----------|
| VKS 34 ST 400 | 400 | 3/4" | 28 | 18 | 39,5 | 32 | 45 |
| VKS 114 ST 400 | 400 | 1.1/4" | 44 | 29 | 54,0 | 44 | 55 |
| VKS 2 ST 400 | 400 | 2" | 61 | 43 | 79,4 | 67 | 70 |
| VKS 212 ST 400 | 400 | 2.1/2" | 80 | 53 | 94,2 | 60 | 80 |
| VKS 3 ST 400 | 400 | 3" | 90 | 58 | 104,0 | 90 | 90 |

Ehitusseeria: LL = väga kerge L = kerge S = raske – PN = nimirõhk PB = maks. töörihk