

# G HB IR VA

Pealekeeratav liitmik

## Omadused

**Ühendus 1** BSP-väliskeere, silindriline

**Tihenditüüp 1** 60° sisekoonus



**Ühendus 2** BSP-sisekeere, silindriline

**Tihenditüüp 2** lametihend

**Tüüp** Pealekeeratav liitmik

**Ehitustüüp** Sirge

**Materjal** Roostevaba teras

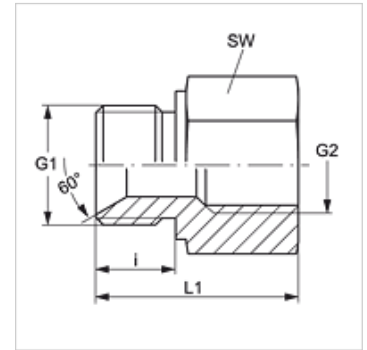

## Artikkel

| Märgistus     | G1           | G2           | SW<br>(mm) |
|---------------|--------------|--------------|------------|
| G HB 02 IR VA | G 1/8" -28   | G 1/8" -28   | 17         |
| G HB 04 IR VA | G 1/4" -19   | G 1/4" -19   | 19         |
| G HB 06 IR VA | G 3/8" -19   | G 3/8" -19   | 24         |
| G HB 08 IR VA | G 1/2" -14   | G 1/2" -14   | 27         |
| G HB 12 IR VA | G 3/4" -14   | G 3/4" -14   | 32         |
| G HB 16 IR VA | G 1" -11     | G 1" -11     | 41         |
| G HB 20 IR VA | G 1.1/4" -11 | G 1.1/4" -11 | 50         |
| G HB 24 IR VA | G 1.1/2" -11 | G 1.1/2" -11 | 55         |
| G HB 32 IR VA | G 2" -11     | G 2" -11     | 70         |

SW = võtme suurus

## Toote variandid

G HB IR Pealekeeratav liitmik, Teras