


PHD 100

Kaetud vooliku pressühendus

HANSA FLEX

Omadused

Ühendusetüüp	Hülssühendus
sobilik	1SN (HD 100, HD 100T, HF 100, HW 100) 1SC (KP 100 KP) 2SC (KP 200, KP 200PRO, KP 200S)
Materjal	Teras
Pinnatöötlus	galvaniseeritud

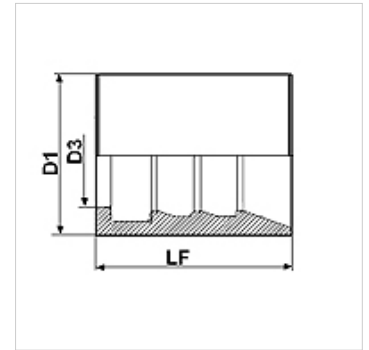

Vihje

Ühenduse paigutus sõltub voolikutüübist.

Artikkel

Märgistus	DN*	Suurus	Toll	D1 (mm)	D3 (mm)	LF (mm)
PHD 104	5	3	3/16"	17	8,5	26,0
PHD 106	6	4	1/4"	20	10,9	31,0
PHD 108	8	5	5/16"	21	12,8	31,0
PHD 110	10	6	3/8"	24	14,0	31,0
PHD 113	12	8	1/2"	28	18,3	35,0
PHD 116	16	10	5/8"	31	21,6	36,0
PHD 120	19	12	3/4"	35	24,8	42,5
PHD 125	25	16	1"	42	30,5	50,5
PHD 132	31	20	1.1/4"	52	37,7	59,0
PHD 140	38	24	1.1/2"	58	44,2	63,0
PHD 150	51	32	2"	71	57,2	70,0

DN = nimiläbimõõt, nimiläius