

TR HL

Sissesurutav nippel, CEL

HANSA FLEX

Omadused


Ühendus 1 Meetriline väliskeere, silindriline

Tihenditüüp 1 24° sisekoonus

Tavaline ISO 8434-1

Materjal Teras

Pinnatöötlus galvaniseeritud

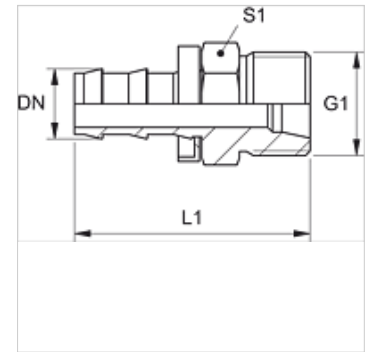

Artikkel

| Märgistus | DN | Suurus | Toll | G1 | Toru välimise-Ø jaoks (mm) | L1 (mm) |
|-------------|----|--------|-------|------------|----------------------------|---------|
| TR 04 HL | 5 | 3 | 3/16" | M 12 x 1,5 | 6 | 30 |
| TR 06 HL | 6 | 4 | 1/4" | M 14 x 1,5 | 8 | 31 |
| TR 08 HL 06 | 8 | 5 | 5/16" | M 14 x 1,5 | 8 | 38 |
| TR 08 HL | 8 | 5 | 5/16" | M 16 x 1,5 | 10 | 38 |
| TR 10 HL 08 | 10 | 6 | 3/8" | M 16 x 1,5 | 10 | 38 |
| TR 10 HL | 10 | 6 | 3/8" | M 18 x 1,5 | 12 | 39 |
| TR 13 HL | 12 | 8 | 1/2" | M 22 x 1,5 | 15 | 52 |