



# HK GEH 20 AL

Ventiili korpus keerdventiilile SAE 2-käiguline alumiiniumist

**HANSA FLEX**

## Omadused

<b>Materjal</b>	Alumiinium AlZnMgCu1,5
<b>Töö rõhk</b>	maks 250 baari
<b>Pinnatöötlus</b>	anodeeritud

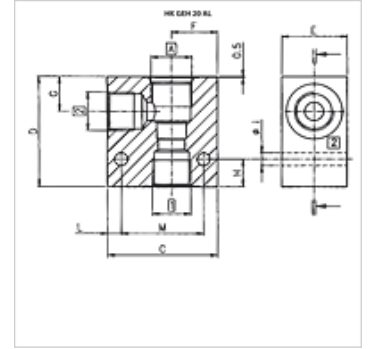

## Artikkel

Märgistus	Ventiiliava suurimine	A	Ühendus <sup>1,3</sup>	C	D	E	F	G	H	I	L	M	Kaal
				(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
HK GEH 38 C0820	C0820	UNF 3/4" -16	G 3/8"	50	50	29	20	13,5	12	6	9,0	35	0,2
HK GEH 38 C1020	C1020	UNF 7/8" -14	G 3/8"	60	60	39	24	19,0	15	7	7,5	45	0,4
HK GEH 34 C1020	C1020	UNF 7/8" -14	G 3/4"	60	60	44	24	21,5	15	7	7,5	45	0,6
HK GEH 12 C1220	C1220	UNF 1,1/16" -12	G 1/2"	80	80	49	34	26,0	18	9	10,0	60	0,8
HK GEH 34 C1220	C1220	UNF 1,1/16" -12	G 3/4"	80	80	49	34	26,0	18	9	10,0	60	0,8

## on järgnevate toodete lisatarvikud

HK EMDV	2/2-käigulised magnetventiilid EMDV
HK RVPS	Kaitseklapp RVPS
HK PCFC	2-käiguline voolu reguleerimise ventiil PCFC