


# HK 054 322

Counterbalancing valve SC, single-acting

**HANSA FLEX**

## Omadused

<b>Rakendamine</b>	ühepoolse toimega lahtilukustamatu Istuga mudel – lekkevaba
<b>Materjal</b>	Korpus: Alumiinium Terasest sisedetailid
<b>Töörõhk</b>	max 350 baari

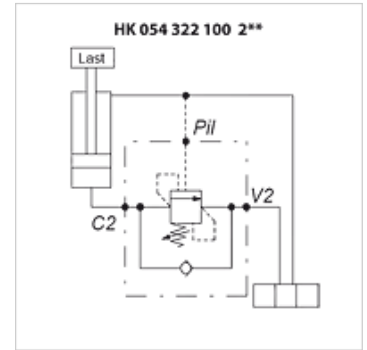

## Vihje

maks rakenduv surve 270 baari

## Artikkel

Märgistus	Keere	Surveala bar	Q max. (L/min)	Pealevoolutug- evus	A	B	C	D	E	F	H	I	Rakendamine	Kaal
					(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		(kg)
HK 054 322 100 220	G 3/8"	60–210	40	1:3,55	160	30	60	20	40	65	12	100	-	0,75
HK 054 322 100 235	G 3/8"	120–350	40	1:3,55	160	30	60	20	40	65	12	100	-	0,75
HK 054 322 100 320	G 1/2"	60–210	70	1:3,55	185	35	80	26	41	71	18	107	mõõteühendusega	1,20
HK 054 322 100 335	G 1/2"	120–350	70	1:3,55	185	35	80	26	41	71	18	107	mõõteühendusega	1,29