

# FI ND E SF

Madalsurvefiltri SF filterelement

**HANSA FLEX**


## Omadused

Temperatuur min. -25 °C

Temperatuur max. 120 °C

Materjal Tihend: NBR

Töö rõhk max 10 baari

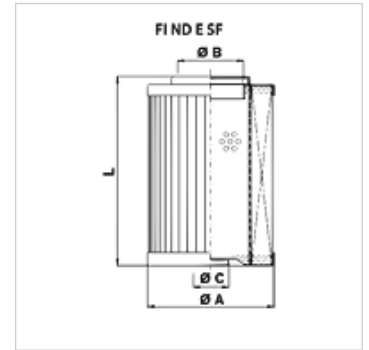

## Artikkel

Märgistus	Filtri peensus (µm)	Filtri pind (cm <sup>2</sup> )	Filter material	L (mm)	Ø A (mm)	Ø B (mm)	Ø C (mm)	Kaal (kg)
FI ND E SF 0090 A03	3,0	1297	anorgaaniline	99,0	73,6	32,0	32,0	1,15

Qmaks – maksimaalne mahuvool