

# FI ND E UF

Madalsurvefiltri UF filterelement

**HANSA FLEX**


## Omadused

Temperatuur min. -25 °C

Temperatuur max. 120 °C

Materjal Tihend: NBR

Töö rõhk max 10 baari

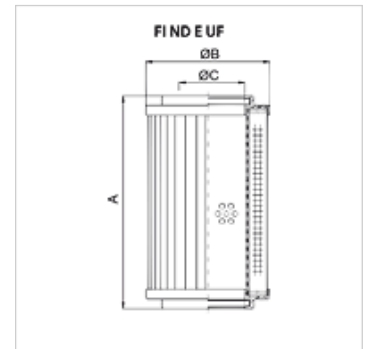

## Artikkel

Märgistus	Filtri peensus (µm)	Filtri pind (cm <sup>2</sup> )	Filter material	A (mm)	Ø B (mm)	Ø C (mm)	Kaal (kg)
FI ND E UF 0010 A03	3,0	3260	anorgaaniline fiiberklaas	210,0	99,0	51,5	1,00
FI ND E UF 0010 A06	6,0	3260	anorgaaniline fiiberklaas	210,0	99,0	51,5	1,00
FI ND E UF 0011 A10	10,0	3260	anorgaaniline fiiberklaas	210,0	99,0	51,5	0,58

for Bypass flow filter system NSFA Typ C

## on järgnevate toodete varuosad

NSFA Typ C Kõrvalvoolu-filtriseade, C-tüüpi