

FI R L E AR

Tagasivoolufiltri AR filterelement

HANSA FLEX

Omadused


Rakendamine moodsaviiguklapiga 1,5 baari

Temperatuur min. -25 °C

Temperatuur max. 120 °C

Materjal Tihend: NBR

Töörõhk max 20 baari

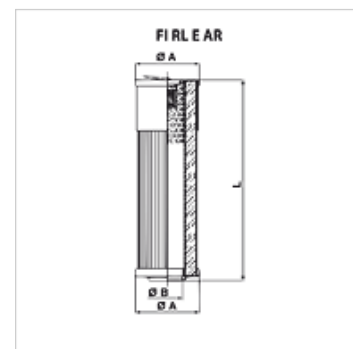

Artikkel

Märgistus	Filtri peensus (µm)	Filtri pind (cm ²)	Filter material	Ø A (mm)	Ø B (mm)	L (mm)	Kaal (kg)
FI R L E AR 0040 P25 V1.5	25,0	1879	organic	50	19,5	100,00	0,55
FI R L E AR 0050 P16 V1.5	16,0	1879	organic	60	28,5	200,15	0,29